


Type KV-ME (multi-insert)

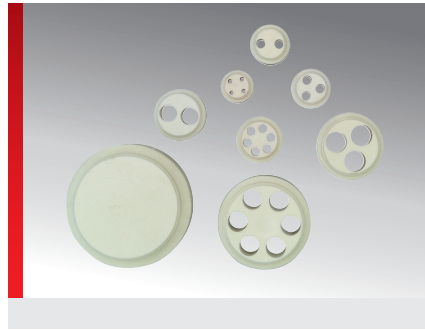

PRODUCT INFORMATION

The KV-ME multi-insert can be used both in WKK cable fittings and in WKM cable fittings. The KV-ME multi-insert can be used to route several cables through one fitting. The fitted seal insert in the cable fitting is simply swapped for the KV-ME multi-insert during assembly. Please note that the cable diameter may be up to 20% less than the diameter of the hole, but must not under-

shoot the hole diameter by less than 1 mm.

The KV-ME multi-inserts feature the following advantages:

- Variable
- More cables through one fitting
- High protection class

NOT suitable for the m-seal cable fittings.

SPECIFICATIONS



Elastomer



IP 65

-40 – 100 °C transient / short term
120 °C

RoHS

Type	Order No.	No. Openings	Diameter mm	Suitable for metric	Suitable for Pg	Suitable for NPT	Pack qty.
KV-ME M16/Pg09-4x1.4	8358221000	4	1.40	M16x1,5	Pg 09	3/8"	50
KV-ME M16/Pg09-2x3	8358221200	2	3.00	M16x1,5	Pg 09	3/8"	50
KV-ME M20/Pg13.5-2x5	8358222000	2	5.00	M20x1.5	Pg 13.5	1/2"	50
KV-ME M20/Pg13.5-3x2	8358222200	3	2.00	M20x1.5	Pg 13.5	1/2"	50
KV-ME M20/Pg13.5-3x4	8358222400	3	4.00	M20x1.5	Pg 13.5	1/2"	50
KV-ME M20/Pg13.5-6x3	8358222600	6	3.00	M20x1.5	Pg 13.5	1/2"	50
KV-ME Pg11-2x3	8358221400	2	3.00		Pg 11		50
KV-ME Pg11-2x4	8358221600	2	4.00		Pg 11		50
KV-ME Pg11-3x3	8358221800	3	3.00		Pg 11		50
KV-ME Pg16-2x6	8358222800	2	6.00		Pg 16		50
KV-ME Pg16-3x3	8358223000	3	3.00		Pg 16		50
KV-ME Pg16-3x4	8358223200	3	4.00		Pg 16		50
KV-ME Pg16-3x5.6	8358223400	3	5.60		Pg 16		50
KV-ME Pg16-4x4	8358223600	4	4.00		Pg 16		50
KV-ME Pg16-5x4	8358223800	5	4.00		Pg 16		50
KV-ME Pg16-6x4	8358224000	6	4.00		Pg 16		50
KV-ME M25/Pg21-2x8	8358224200	2	8.00	M25x1.5	Pg 21	3/4"	50
KV-ME M25/Pg21-3x7	8358224400	3	7.00	M25x1.5	Pg 21	3/4"	50
KV-ME M25/Pg21-4x6	8358224600	4	6.00	M25x1.5	Pg 21	3/4"	50
KV-ME M32/Pg29-6x6.5	8358224800	6	6.50	M32x1.5	Pg 29		50
KV-ME M32/Pg29-4x9	8358225000	4	9.00	M32x1.5	Pg 29		25
KV-ME M40/Pg36 blind	8358228400			M40x1.5	Pg 36	1 1/2"	25

MATERIAL PROPERTIES



Elastomer

Type KV-ME (multi-insert)

MECHANICAL PROPERTIES

IP Protection class
IP 65

THERMAL PROPERTIES

 **Temperature / temperature range**
-40 – 100 °C transient / short term 120 °C

CONFORMITY

RoHS RoHS (EC Directive 2002/95/EC)

All details given in our sales material prospectuses and catalogues as well as the information available online are based on our current knowledge of the products described.

The electronic data and files made available by Murrplastik, particularly CAD files are based on our current knowledge of the product described.

A legally binding assurance of certain properties or the suitability for a certain purpose can not be determined from this information.

All information with respect to the chemical and physical properties of Murrplastik products as well as application advice given verbally, in writing or by tests, is given to the best of our knowledge.

This does not free the purchaser of carrying out their own inspections and tests in order to determine the suitability of a product for a specific purpose.

Murrplastik accepts no responsibility for the available information being up-to-date, correct or complete. Neither do we accept responsibility for the quality of this information.

Murrplastik accepts no liability for damage caused as a result of using our products.

Murrplastik reserves the right to make technical changes and improvements through constant further development of products and services.

Our General Terms and Conditions apply.

© Murrplastik Systemtechnik GmbH • proID_66241~20161215~890283~suv_kvme